



# Kässbohrer

Driven by professionals®



**metago® pro**

## WEIGHTS AND DIMENSIONS

## TWIN-AXLE TRAILER

*The metago® pro offers an optimum load factor with high efficiency and ease of use. The outstanding features of the metago® pro result in virtually unlimited loading options.*

- Large loading width offers easy opening of the vehicle doors during loading and unloading
- Maximum entry width available by lifting and tilting the fenders outwards
- Easy and safe stacking by using adjustable kick-up ramps (optionally with hydraulic actuation)
- Optimized loading height due to the trailer's single tyres
- Flexible operation in case of permanently changing loading demands

**Net weight of the superstructure:**  
min. 6,850 - max. 7,750 kg

**Wheel base:**  
6,085 mm

**Overall vehicle length:**  
10,300 mm

**Overall vehicle width:**  
2,550 mm

**Entry height:**  
2,240 mm

**Platforms passage width:**  
2,400 mm - upper platform  
2,325 mm - lower platform  
2,000 mm - between trailer axles

**Type:**



metago® pro

## Configuration of the *metago*® *pro* twin-axle trailer


### Standard equipment:

- Bolted light metal construction, fully galvanized
- Hydraulic system with automatic locks
- Front lifting system telescopic and lowerable
- Front and rear lifting system with automatic locking
- Upper platform front and rear extensions hydraulically movable
- Optimal loading height due to low superstructure layout
- Hydraulic rear extension of the ramp box
- Rear and sidewall LED marking lights
- Air suspension with dropped BPW tandem axles and single tyres
- Brake system with Anti Block System EBS and stability control assistant

### Optional equipment:

- Additional adjustable pans on upper loading platform
- Pipes for automatic lubrication
- Hydraulic drawbar, steplessly telescopic (900 mm)
- Center kick-up ramp, hydraulically adjustable in height and length (1,300 mm extendable)
- Front kick-up ramp, hydraulically adjustable in height and length (980 mm)
- Upper rear platform with integrated stacking ramp

For more details and additional equipment options please refer to the respective data sheets. The illustrations are used as examples and might show vehicles with optional equipment. We reserve the right to make changes due to errors or based on technical progress.

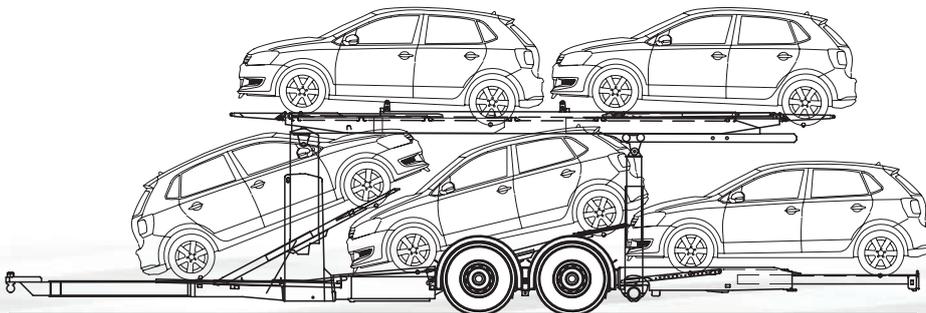

Loading example metago® pro with 4,00 m height.  
Observe national regulations!

### Driven by professionals®

Your decision gives you the security to own and use a vehicle produced by a company who is famous in the market for the quality and the durability of its products.

Kässbohrer transporter superstructures are compatible with chassis of all leading truck manufacturers. The design of our car carriers gives you the possibility to combine trucks and trailers from different models and to adjust them to fit your individual needs.

All the standard spare parts are available in our service center and at our contractual partners. You can also check our online catalogue for more detailed information and for a trouble-free ordering process.

Repairs are carried out quickly and reliably at our headquarters workshop in Eugendorf (Austria) and the authorized workshops along major European transport routes.

