





TRUCK SUPERSTRUCTURE

The ecomode performance line includes closed motor vehicles and central-axle trailers, especially for the safe transport of particularly exclusive limousines, precious prototypes, individual exhibition vehicles and vintage cars.

- Maximum protection and safety for the vehicles to be transported
- The *ecomode performance S2-180* is combined with trailer model *T4-235*, loading is carried out through the trailer, the folding doors at the rear can be opened easily
- Comfortable loading of vehicles with low ground clearance
- Large folding doors on both sides of the vehicle provide easy access and good visibility to the loades vehicles
- Flexible in use, expecially for urban and distribution transport

Technically permissible maximum mass: 18,000 kg

Maximum payload: 5,900 kg

Length of inside tracks: 5,300 mm

Entry width: 2,300 mm

Overall vehicle length: max. 7,740 mm

Notice:

The S2-180 truck is combined with the T4-235 trailer, standalone operation is not possible

Type:



ecomode performance S2-180

ecomode performance S1-075 ecomode performance S2-260 ecomode performance S4-260 L ecomode performance S2-180 ecomode performance T2-180 ecomode performance T4-235 capitan performance 6-280 ecotrans performance 6-250



Configuration of the

truck superstructure

performance 52-150


Standard equipment:

- Fully hot-dip galvanised lower loading platform with two pairs of pan fields and ten pairs of pan covers
- Fully hot-dip galvanised upper loading platform with four spindle lifting pillars
- Box body with double doors on left and right side, rear door as folding door
- Stainless steel tool box

Optional equipment:

- Radio remote control for all *ecomode* functions
- Tie-down eyelets with load securing certificate for general cargo transport
- Cable winch installed at the front bottom pillar support
- Multicolour lacquering / metallic lacquering

For more details and additional equipment options please refer to the respective data sheets. The illustrations are used as examples and might show vehicles with optional equipment. We reserve the right to make changes due to errors or based on technical progress.

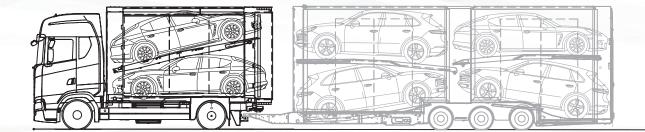

Loading example ecomode performance S2-180 combined with ecomode performance T4-235 with 4 m height. Observe national regulations!



Driven by professionals®

When you purchase a Kässbohrer vehicle transporter, you not only acquire the vehicle but also a wealth of services and the certainty that you are driving the transporter of a company that is the market leader concerning quality and consistency.

Kässbohrer vehicle transporters are compatible with the chassis of all leading truck manufacturers. The design of Kässbohrer vehicle transporters makes it possible to combine motor vehicles and trailers of different model series and thus precisely adapt them to your individual transport requirements.

All common spare parts are quickly available from the Kässbohrer Service Center and from the contractual partners. A user-friendly spare parts catalogue, with a lot of additional information and the possibility of online access, guarantees problem-free ordering. Repairs are carried out quickly and reliably in our own workshop in Salzburg-Eugendorf (Austria) and at the contracted workshops on the main European transport routes.

