



ecotrans
performance

Kässbohrer
Driven by professionals®



performance 6-250

WEIGHTS & DIMENSIONS

SEMITRAILER

The ecotrans has been designed for safe transportation of exclusive vehicles, high-value prototypes and individual exhibition models.

- ◆ Guarantees the highest possible security for the loaded vehicles
- ◆ Box-body layout with light sandwich design: the ecotrans CVt model includes a hydraulic extension at the rear end
- ◆ Particularly low drive-on and drive-over angles
- ◆ The spindle lifting systems for the upper platform are easy to use and offer low maintenance costs
- ◆ Individual position of the sidewall doors for a comfortable and easy loading
- ◆ The ecotrans CVtg particularly stands out because of its two-part upper platform, which further improves the load factor and the resulting flexibility of storing positions

Net weight of the semitrailer:

Ecotrans CVtg: 12,500 – 13,200 kg
Ecotrans CVt: 11,800 – 12,000 kg

Wheel base

(king pin – middle of rear axles):
7,950 mm

Overall semitrailer length:

13,600 mm

Overall semitrailer width:

2,550 mm

Entry height:

2,400 mm

Passage width between the lifting systems:

2,260 mm

Passage width between the wheels of the semitrailer axles:

2,000 mm

Type:



ecotrans
performance

ecomode performance S1-075
ecomode performance S2-260
ecomode performance S4-260 L

ecomode performance S2-180
ecomode performance T2-180
ecomode performance T4-235

capitan performance 6-280
ecotrans performance 6-250

Configuration of the *ecotrans* semitrailer *performance 6-250*


Standard equipment:

- ◆ High quality steel profiles in lightweight construction
- ◆ Front and rear lifting mechanism inside supporting pillars with spindle lifting gears
- ◆ Loading platforms are hot-dip galvanized
- ◆ Hydraulic drive-on ramp from hollow aluminium structure with pneumatic locking
- ◆ Doors: integrated rotary handles and spring fixing of open doors, door locks secured
- ◆ Brake system with Anti Block System EBS and stability control assistant

Optional equipment:

- ◆ Two-piece upper platform (type CVtg)
- ◆ Individual variations of the body structure (number, kind, position of the lateral doors)
- ◆ Lifting and lowering system for semitrailer axles with remote actuation from the driver's cab
- ◆ Hydraulic winch, including free-wheeling actuation, cover sheets, deflection and guiding rollers, wireless remote control
- ◆ Wireless remote control for all hydraulic functions (type CVtg)

For more details and additional equipment options please refer to the respective data sheets. The illustrations are used as examples and might show vehicles with optional equipment. We reserve the right to make changes due to errors or based on technical progress.

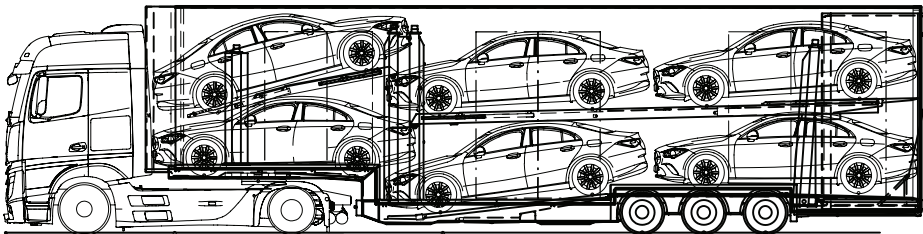

Loading example ecotrans performance 6-250 - two-part-upper platform - with 4 m height. Observe national regulations!

Driven by professionals®

When you purchase a Kässbohrer vehicle transporter, you not only acquire the vehicle but also a wealth of services and the certainty that you are driving the transporter of a company that is the market leader concerning quality and consistency.

Kässbohrer vehicle transporters are compatible with the chassis of all leading truck manufacturers. The design of Kässbohrer vehicle transporters makes it possible to combine motor vehicles and trailers of different model series and thus precisely adapt them to your individual transport requirements.

All common spare parts are quickly available from the Kässbohrer Service Center and from the contractual partners. A user-friendly spare parts catalogue, with a lot of additional information and the possibility of online access, guarantees problem-free ordering. Repairs are carried out quickly and reliably in our own workshop in Salzburg-Eugendorf (Austria) and at the contracted workshops on the main European transport routes.

