



# Kässbohrer

Driven by professionals®



**intago®**

## WEIGHTS & DIMENSIONS

## TWIN-AXLE TRAILER

The *intago®* model range is characterized by an excellent price-performance ratio and multiple loading options. In addition, the model versions *ts* and *tt* offer the appropriate options for any purpose.

- Maximum payload and entry width provided by the twin tyre design
- Outstanding driving stability
- Optimized net weight to keep the fuel consumption low
- *intago® ts*: features a pillar group with a spindle lifting system. It offers a maximum lifting capacity and a high cost effectiveness
- *intago® tt*: stepless adjustment of the lowerable lifting systems
- Especially flexible and suitable for transporting SUV's

### Net weight of the superstructure:

*intago® ts*: min 7,150 - max. 7,950 kg  
*intago® tt*: min 7,400 - max. 8,200 kg

### Wheel base:

6,010 mm

### Overall vehicle length:

10,300 mm

### Overall vehicle width:

2,550 mm

### Entry height:

2,200 mm

### Platforms passage width

2,400 mm - upper platform  
2,325 mm - lower platform

### Type:



*intago® tt*



*intago® ts*

## Configuration of **Intago**® twin-axle trailer


### Standard equipment:

- Bolted light metal construction, fully galvanized
- Hydraulic system with automatic locks
- Front lifting system:  
intago® ts: supporting pillars with lifting spindle gear  
intago® tt: telescopic pillars for extending and lowering
- Ramp box with hydraulic rear extension
- Upper platform extensions with adjustable flaps at front and rear end
- Rear and sidewall LED marking lights
- Air suspension with dropped BPW tandem axles and single tyres
- Brake system with Anti Block System EBS and stability control assistant

### Optional equipment:

- Additional adjustable pans in the upper loading platform
- Pipes for automatic lubrication
- Hydraulic drawbar, steplessly telescopable (900 mm)
- Intermediate kick-up ramp, hydraulic height adjustment (1,100 mm extendable)
- Upper rear platform with integrated stacking ramps
- Front drive-on and loading platform:  
PLUS edition: fully adjustable platform (1,700 mm)

For more details and additional equipment options please refer to the respective data sheets. The illustrations are used as examples and might show vehicles with optional equipment. We reserve the right to make changes due to errors or based on technical progress.

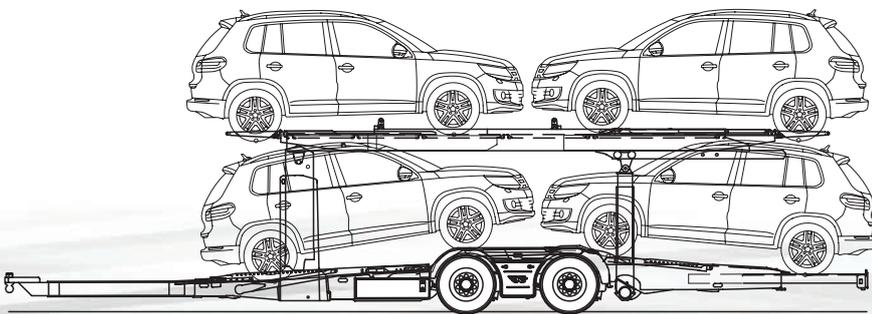

Loading example intago® with 4,00 m height.  
Observe national regulations!

### Driven by professionals®

Your decision gives you the security to own and use a vehicle produced by a company who is famous in the market for the quality and the durability of its products.

Kässbohrer transporter superstructures are compatible with chassis of all leading truck manufacturers. The design of our car carriers gives you the possibility to combine trucks and trailers from different models and to adjust them to fit your individual needs.

All the standard spare parts are available in our service center and at our contractual partners. You can also check our online catalogue for more detailed information and for a trouble-free ordering process.

Repairs are carried out quickly and reliably at our headquarters workshop in Eugendorf (Austria) and the authorized workshops along major European transport routes.

