



Kässbohrer

Driven by professionals®



supertrans®

WEIGHTS AND DIMENSIONS

TWIN-AXLE TRAILER

Our supertrans® trailer offers a high load capacity and an outstanding driving stability. And if durability and operations speed are important criteria for you, the supertrans® is the best.

- ◆ Its high lifting capability offers the transport of vehicles with an axle load up to 4.5 tons
- ◆ The combination of high payload, the two-arms lifting system and the twin axle tyres makes the supertrans® the allrounder for flexible loading and transport of mixed loads
- ◆ Clearly laid-out controls ensure quick and efficient loading and unloading as well as high efficiency
- ◆ Especially flexible and suitable for transporting wide and heavy vehicles

Net weight of the superstructure:
min. 8,150 - max. 9,000 kg

Wheel base:
6,690 mm

Overall vehicle length:
10,300 mm

Overall vehicle width:
2,550 mm

Entry height:
2,060 mm

Platforms passage width
2,390 mm - upper platform
2,380 mm - lower platform

Type:



supertrans®

Configuration of the *supertrans*® twin-axle trailer


Standard equipment:

- Bolted light metal construction, fully galvanized
- Hydraulic system with automatic locks
- Front and rear two-armed lifting system with pneumatic locks
- Upper platform front and rear extensions hydraulically movable
- Ramp box with hydraulic rear extension
- Rear and sidewall LED marking lights
- Air suspension with BPW tandem axles and twin tyres
- Brake system with Anti Block System EBS and stability control assistant

Optional equipment:

- Pipes for automatic lubrication
- Additional adjustable pans in the upper loading platform
- Hydraulic drawbar, steplessly telescopic (900 mm)
- Intermediate kick-up ramp with hydraulic height adjustment (900 mm extendable)
- Front drive-on and loading platform with additional hydraulic rear extension (550 mm)

For more details and additional equipment options please refer to the respective data sheets. The illustrations are used as examples and might show vehicles with optional equipment. We reserve the right to make changes due to errors or based on technical progress.

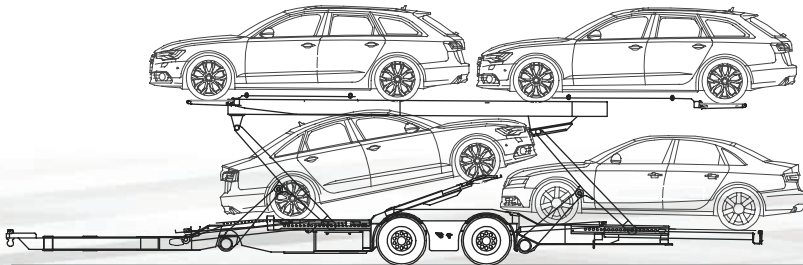

Loading example *supertrans*® with 4,00 m height.
Observe national regulations!

Driven by professionals®

Your decision gives you the security to own and use a vehicle produced by a company who is famous in the market for the quality and the durability of its products.

Kässbohrer transporter superstructures are compatible with chassis of all leading truck manufacturers. The design of our car carriers gives you the possibility to combine trucks and trailers from different models and to adjust them to fit your individual needs.

All the standard spare parts are available in our service center and at our contractual partners. You can also check our online catalogue for more detailed information and for a trouble-free ordering process.

Repairs are carried out quickly and reliably at our headquarters workshop in Eugendorf (Austria) and the authorized workshops along major European transport routes.

