



# Kässbohrer

Driven by professionals®



**supertrans® pro**

## WEIGHTS AND DIMENSIONS

## TWIN-AXLE TRAILER

*Our supertrans® pro trailer combines particularly high payload with outstanding driving stability. This vehicle transporter also always offers the right solution when the focus is on robustness and speed when loading and unloading.*

- ◆ The combination of high load capacity, the two-arms lifting system and the twin-tyred axle unit makes the supertrans® pro a jack-of-all-trades for flexible loading and the transport of mixed loads
- ◆ This vehicle offers maximum payload and optimum drive-through width thanks to two twin tyres, as well as safe loading of wider vehicles
- ◆ Easy operation results in fast loading and unloading and high efficiency
- ◆ Especially flexible and suitable for transporting wide and heavy vehicles

**Net weight of the superstructure:**  
min. 8,150 - max. 9,000 kg

**Wheel base:**  
1,310 mm

**Overall vehicle length:**  
max. 11,260 mm

**Overall vehicle width:**  
2,550 mm

**Entry height:**  
2,060 mm

**Platforms passage width**  
2,390 mm - upper platform  
2,380 mm - lower platform

**Type:**



supertrans® pro

## Configuration of the *supertrans*<sup>®</sup> *pro* twin-axle trailer


### Standard equipment:

- Bolted light metal construction, fully galvanized
- Hydraulic system with automatic locks
- Front and rear two-armed lifting system with pneumatic locks
- Front drive-on and loading platform, with hydraulic height adjustment at front and rear end, and with manual extension at front end
- Upper platform front and rear extensions hydraulically movable
- Ramp box with hydraulic rear extension
- Vehicle lighting completely LED technology
- Air suspension with BPW tandem axles and twin tyres
- Brake system with Anti Block System EBS and stability control assistant

### Optional equipment:

- Pipes for automatic lubrication
- Additional adjustable pans in the upper loading platform
- Hydraulic drawbar, steplessly telescopic
- Intermediate kick-up ramp with hydraulic height adjustment (1100 mm extendable)
- Integrated stacking platform at the rear end of the upper platform
- Front drive-on and loading platform with additional hydraulic rear extension

For more details and additional equipment options please refer to the respective data sheets. The illustrations are used as examples and might show vehicles with optional equipment. We reserve the right to make changes due to errors or based on technical progress.

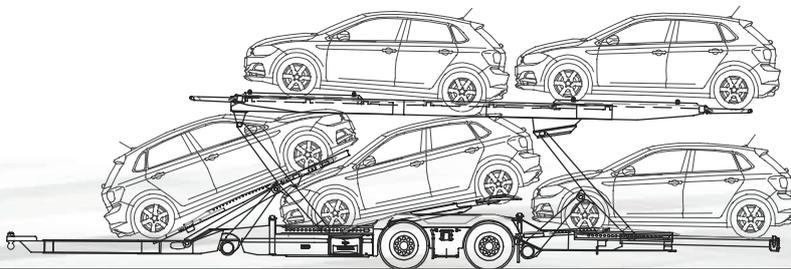

Loading example supertrans<sup>®</sup> pro with 4,00 m height.  
Observe national regulations!

### Driven by professionals<sup>®</sup>

Your decision gives you the security to own and use a vehicle produced by a company who is famous in the market for the quality and the durability of its products.

Kässbohrer transporter superstructures are compatible with chassis of all leading truck manufacturers. The design of our car carriers gives you the possibility to combine trucks and trailers from different models and to adjust them to fit your individual needs.

All the standard spare parts are available in our service center and at our contractual partners. You can also check our online catalogue for more detailed information and for a trouble-free ordering process.

Repairs are carried out quickly and reliably at our headquarters workshop in Eugendorf (Austria) and the authorized workshops along major European transport routes.

