



Kässbohrer

Driven by professionals®



variotrans® pro

WEIGHTS AND DIMENSIONS

TRUCK SUPERSTRUCTURE

The variotrans® pro stands out by an excellent price-performance ratio and impresses with its very easy handling. Efficiency and reliability are the key points of this vehicle transporter.

- The low net weight of the variotrans® pro allows a maximum payload and keeps the fuel consumption low
- Permits a fast and pleasant loading/unloading which will save you time
- Ergonomic layout of the hydraulic controls with a perfect view of the moving platform components
- Its pillar groups and wheel housings are designed for maximum load height
- Features an optimized mounting space for the original fuel tank or for the Kässbohrer fuel reservoir solutions
- Perfect for local and distribution transport

Net weight of the superstructure:
min. 4,150 - max. 4,650 kg

Wheel base:
5,400 – 5,600 mm


Overall vehicle length:
11,270 mm (type A5)
12,300 mm (type A4)

Overall vehicle width:
2,550 mm

Entry height:
2,300 mm

Platforms passage width:
2,400 mm - upper platform
2,230 mm - lower platform

Type:

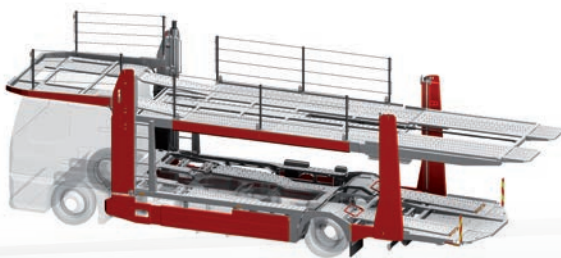

variotrans® pro A4



variotrans® pro A5

Configuration of the **variotrans® pro** truck superstructure


Standard equipment:

- ◆ Bolted superstructure in lightweight steel construction
- ◆ Hydraulic system with automatic locks
- ◆ Spindle lifting system at the platform's front and rear ends
- ◆ Hydraulic extension at the rear end of the upper platform
- ◆ Upper and lower platform in galvanized finish
- ◆ Low loading height due to low superstructure layout
- ◆ Low-wear Kässbohrer hitch ball coupling
- ◆ Non-slip ladder on both sides

Optional equipment:

- ◆ Automatic lubrication system
- ◆ Hydraulic winch, including free-wheeling actuation, cover sheets, deflection and guiding rollers, wireless remote control
- ◆ Drive-on ramps towards the upper front platform with manual extensions (1,000 – 1,500 mm)
- ◆ Lower platform with hydraulic extension to the rear (1,500 mm), kick-up ramps with hydraulic height adjustment and frames for manual extension to the front

For more details and additional equipment options please refer to the respective data sheets. The illustrations are used as examples and might show vehicles with optional equipment. We reserve the right to make changes due to errors or based on technical progress.

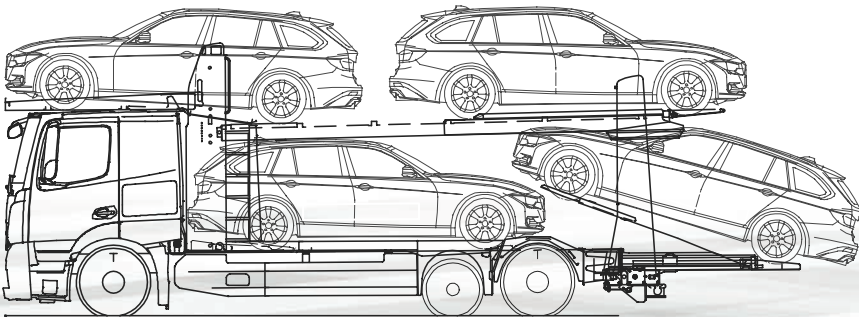

Loading example variotrans® pro type A4 with 4,00 m height.
Observe national regulations!

Driven by professionals®

Your decision gives you the security to own and use a vehicle produced by a company who is famous in the market for the quality and the durability of its products.

Kässbohrer transporter superstructures are compatible with chassis of all leading truck manufacturers. The design of our car carriers gives you the possibility to combine trucks and trailers from different models and to adjust them to fit your individual needs.

All the standard spare parts are available in our service center and at our contractual partners. You can also check our online catalogue for more detailed information and for a trouble-free ordering process.

Repairs are carried out quickly and reliably at our headquarters workshop in Eugendorf (Austria) and the authorized workshops along major European transport routes.

